



Electrochemical Ozone Detection Module

(Model: ZE14-O3)

User's Manual

Version: 1.5

Valid from: 2020-4-28

Zhengzhou Winsen Electronics Technology Co., Ltd

Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our product. To make you use our sensors better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly to get help if you have questions during the usage in the future.

Zhengzhou Winsen Electronics Technology CO., LTD.

Electrochemical Ozone Detection Module ZE14-O3

Product Description

ZE14-O3 is a general-purpose and miniaturization electrochemical Ozone detection module. It utilizes electrochemical principle to detect ozone in air which makes the module with high selectivity and stability. It is a combination of mature electrochemical detection principle and sophisticated circuit design.

Features

- *High sensitivity and resolution, low consumption, long life
- *UART output
- *Two options for detection range: 0~100ppm

Application

Ozone disinfection cabinet, smart home devices &etc.

Parameters

stable1.

Model No.	ZE14-O3
Target Gas	Ozone (O3)
Interference Gas	NO2,CL2&etc.
Output Data	UART Output (3V Electrical Level)
Working Voltage	5±0.1V DC
Warm up time	180S
Response time	≤90S
Resume time	≤90S
Detection Range	0~100ppm
Resolution	0.1ppm
Operating Temp.	-10℃~65℃
Operating Hum.	15%RH-90%RH (No condensation)
Storage temp.	-20℃~65℃
Working life	2 years (in air)

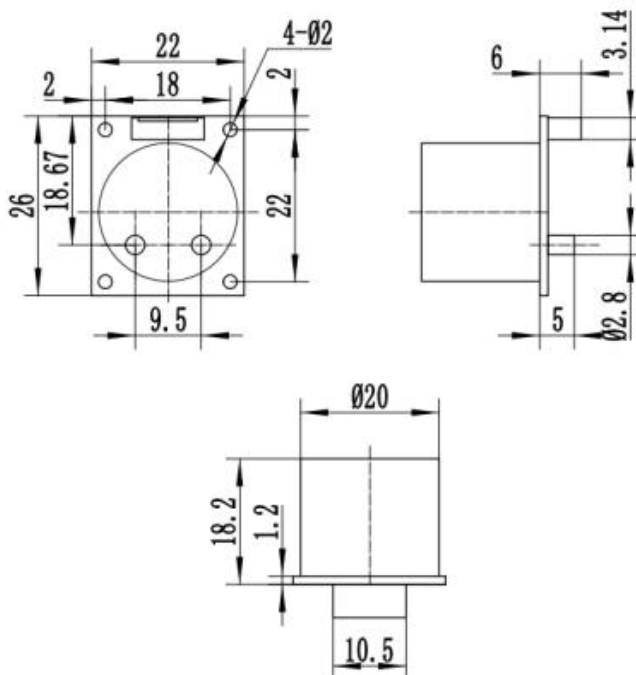



Fig.1 structure (tolerance ±0.1mm)

Pin definition

Table 2

PIN1	Reserved	<p>Fig.2: Pin definition</p>
PIN2	Reserved	
PIN3	GND	
PIN4	Power +	
PIN5	UART (RXD) 0~3V Data input(Connect to 10K pull-up when not in use)	
PIN6	UART (TXD) 0~3V Data output	
PIN7	Reserved	

Communication Protocol

1 General Settings

Table 3

Baud Rate	9600
Data Bits	8 bytes
Stop Bits	1 byte
check bits	Null

2 Commands

The communication of this module is active upload type and it sends gas concentration every other second. The module with 0~100ppm range sends the concentration commands as follow (take 40ppm for example).

Table 4

Byte0	Byte1	Byte2	Byte3	Byte4	Byte5	Byte6	Byte7	Byte8
Start Byte	Gas type	Unit	Number of decimal byte	Concentration (High Byte)	Concentration (Low Byte)	Full Range (High Byte)	Full Range (Low Byte)	Checksum
0xFF	03=0X2A	ppm=0x03	1 byte =0x01	0x01	0x90	0x03	0xE8	0x56

NOTE: 1. The number of decimal byte is 1 for 0~100ppm range.

2. Gas concentration value= (Concentration High Byte *256+ Concentration Low Byte)*0.1
 =(1*256+144)*0.1=40ppm

3 Checksum and calculation.

Checksum = (Negative (Byte1+Byte2+Byte3+Byte4+Byte5+Byte6+Byte7)) +1

I. e:

/******

* Function Name: ucharFucCheckSum (uchar *i,ucharIn)

* Functional description: checksum 【Non(sending/receiving command Byte1+Byte2+...Byte7) +1】

* Function description:

Negate 【Element 1 of Array+ element 2+...Element(n-1)】 +1

*****/

```
unsigned char FucChecksum(unsigned char *i,unsigned char ln)
```

```
{
    unsigned char j,tempq=0;
    i+=1;
    for(j=0;j<(ln-2);j++)
    {
        tempq+=*i;
        i++;
    }
    tempq=(~tempq)+1;
    return(tempq);
}
```

Cautions

1. Prohibit plugging and pulling the sensor on the module.
2. prohibit changing and shifting the installation of electronic components.
3. Sensor shall avoid organic solvent (including silicone and other adhesives), coatings, medicine, oil and high concentration gases.
4. The module cannot withstand excessive impact or vibration.
5. Please keep the modules warming up for at least 5 hours when first time using.
6. Please do not use the modules in systems which related to human being's safety.
7. Please do not use the modules in strong air convection environment.
8. Please do not expose the modules in high concentration organic gas for a long time.
- 9.To avoid positive vertical gas inflowing while the modules are test and used.
10. The inlet surface of the sensor shall not be blocked or contaminated.
11. The waterproof breathable membrane above the sensor is strictly forbidden to be opened and broken.
12. Do not use it if any damage or deformation.
13. Ban using hot melt adhesive or sealant curing temperature higher than 80 ℃ or more to seal the sensor.
14. It is forbidden to store and use in high concentration alkaline gases for a long time.

Zhengzhou Winsen Electronics Technology Co., Ltd

Add: No.299, Jinsuo Road, National Hi-Tech Zone,
Zhengzhou 450001 China

Tel: +86-371-67169097/67169670

Fax: +86-371-60932988

E-mail: sales@winsensor.com

Website: www.winsen-sensor.com